


agricultural cover film

Oroplus® by Plastik



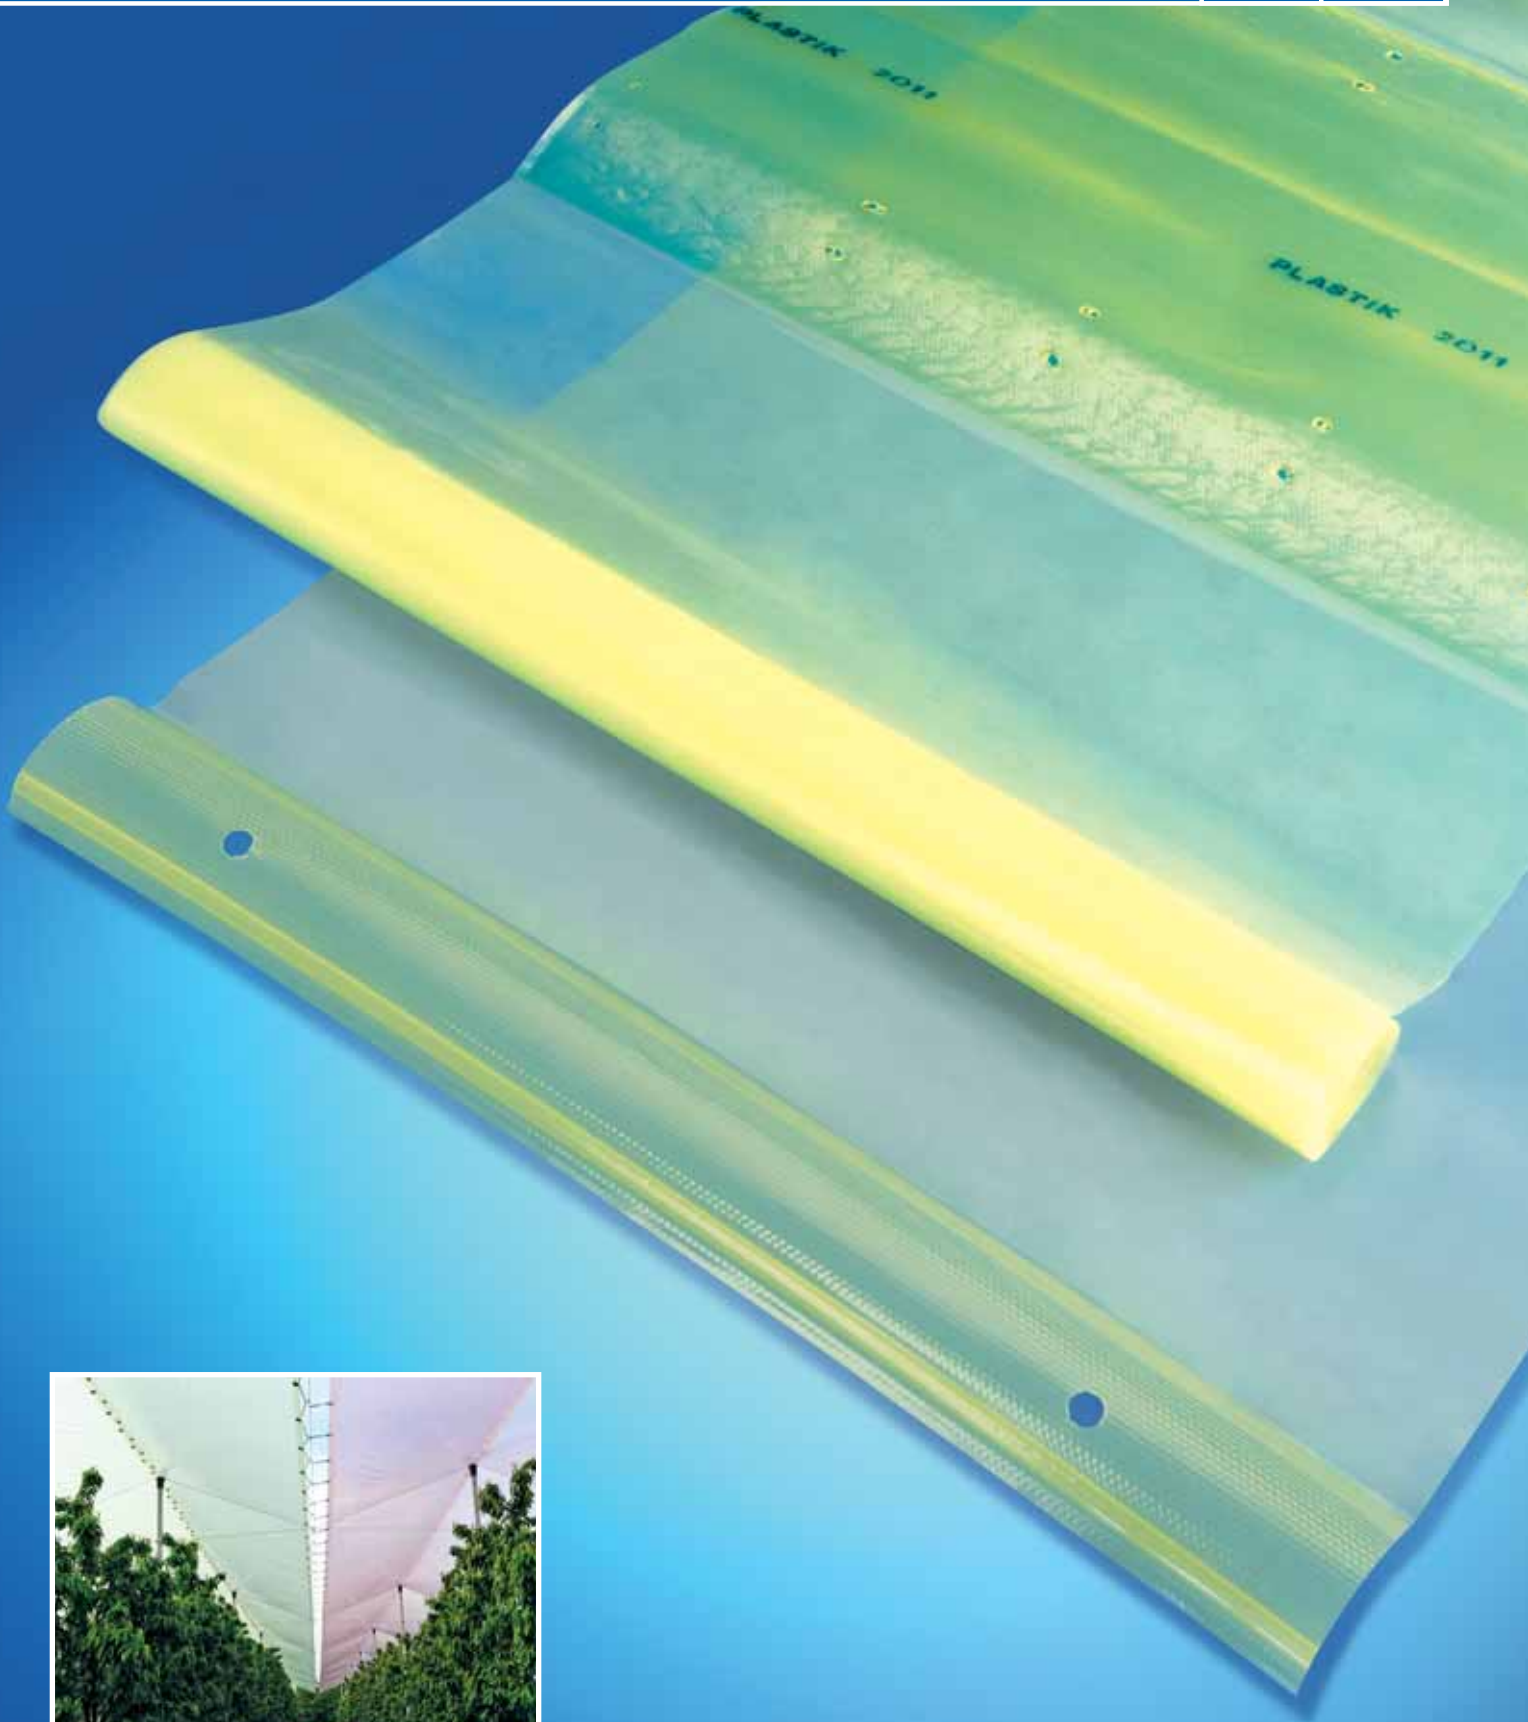


Film Oroplus® by Plastik

The product Oroplus® represents the R&D best result about an important project, raised in 2006.

Plastik technicians have worked to create a completely automated manufacturing plant, one of a kind all over the world. These efforts allow us to offer a thickness-reduced film, which respects the mechanical features for the final use. It has thickened central and lateral bands, not stuck by glue and without grommets. This technology has been patented

under the title "reinforcement for flexible film for covering areas, provided with secure anchoring means" Patent No. 0001393469 dated 20 April 2012.

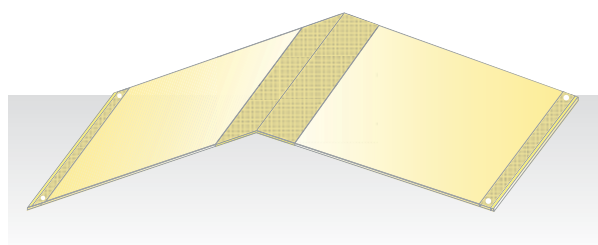

STANDARD FEATURES



Protection



Mechanical strength



Strength against UV radiations



High light transmission

SPECIAL FEATURES



Diffusive



Selecting light



Thermic



UV transparent

The selection of ideal features to obtain a performing film according to the customer requests is carried out through a pre-post selling service, guaranteed by Plastik technicians who are able to support the customer in defining every detail.

- Film thickness from 120 µm to 190 µm
- Lateral and central bands thickness > than 450 µm
- Film width from 1650 mm to 3500 mm
- **Oroplus®** is in accordance with the reference norm EN 13206: 2001

